

For tutorial videos, FAQs, manuals, and more information, please visit:

<https://support.anker.com>

Or scan the QR code below:




@anker\_official  
@anker\_jp



@AnkerDeutschland  
@AnkerJapan  
@Anker



@AnkerOfficial  
@Anker\_JP

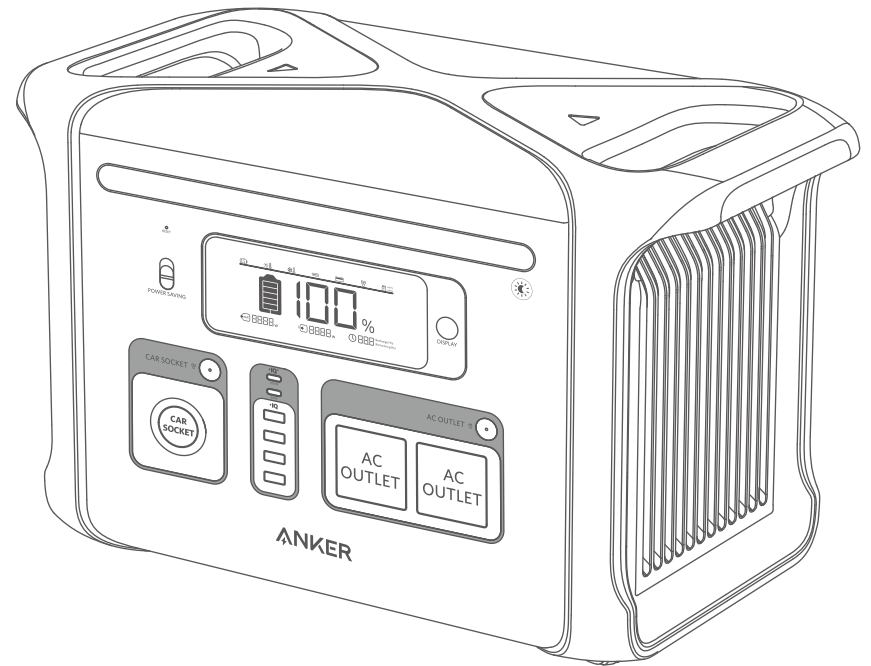


Anker **757** Portable Power Station  
(PowerHouse 1229Wh)


## USER MANUAL



## What's in the Box




Anker 757 Portable Power Station (PowerHouse 1229Wh)



Dust-proof Bag



AC Charging Cable



Solar Charging Cable




Car Charging Cable



User Manual

## Overview

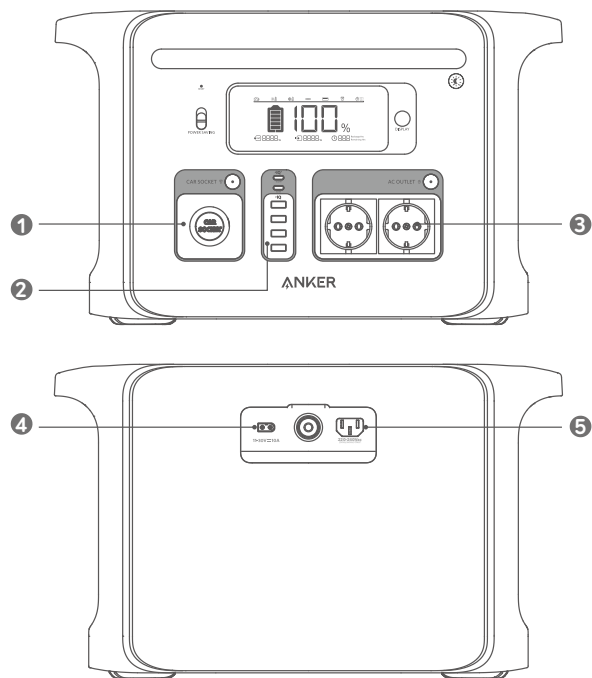

### Output Ports:

- 1 Car Socket
- 2 USB Ports
- 3 AC Output Ports


### Input Ports:

- 4 XT-60 DC Input Port
- 5 AC Input Port

## Recharging Your Power Station


### AC recharging (1000W Max)

Recharge your Power Station by connecting to a wall outlet with the AC charging cable.

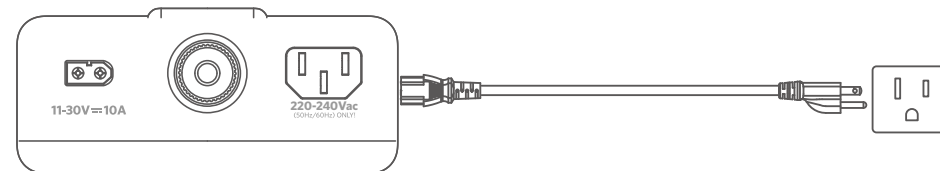


### Solar panel recharging (300W Max)

Recharge your Power Station by connecting up to 3 100W solar panels in parallel with a solar charging cable.

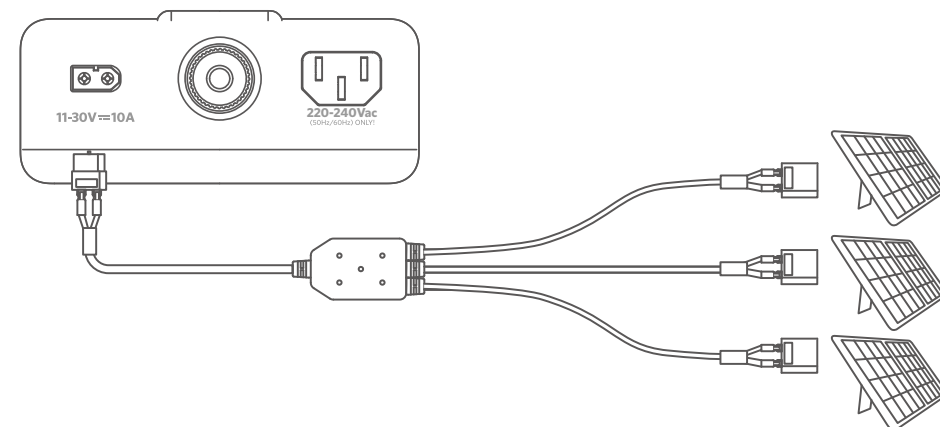

### Car recharging (120W Max)

Recharge your Power Station by connecting to a car's output port with the car charging cable.

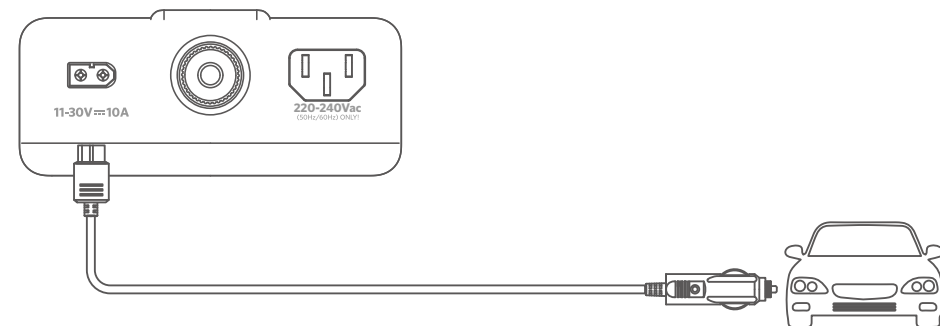


When your portable power station only has 1% battery remaining, the Remaining Battery indicators will flicker to remind you to recharge the product.

## Powering Your Devices


### AC charging

Press the AC button and connect your devices to the AC output ports.

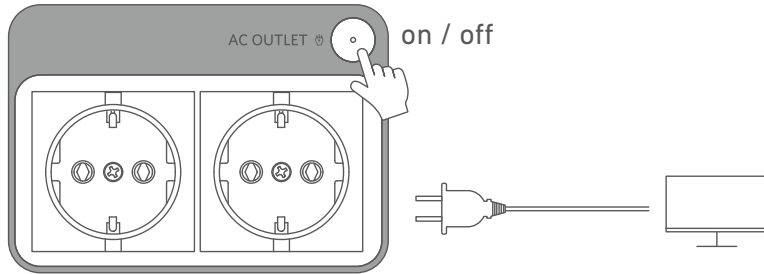


### USB charging

Connect your devices to the USB ports.

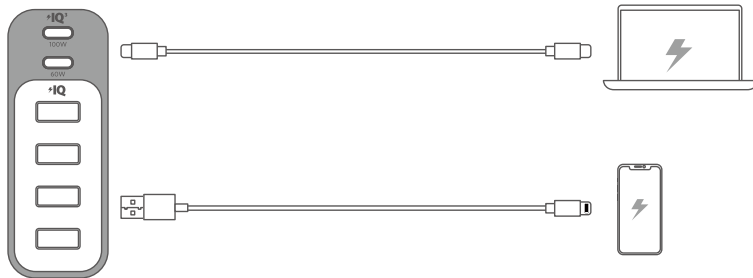


### Car socket charging

Turn on the car socket and connect your devices to start charging.

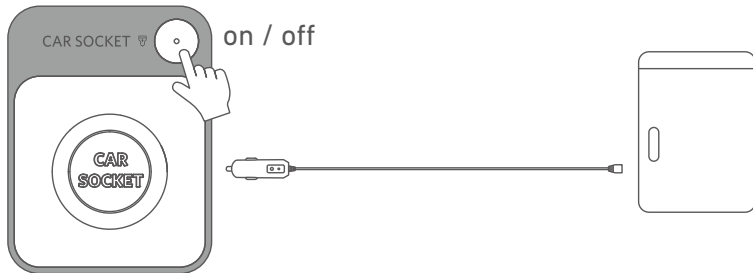

## Uninterruptible Power Supply (UPS)


To use the UPS function, connect your Power Station to a wall outlet with the AC charging cable, then press the button and connect your devices via the AC output ports.

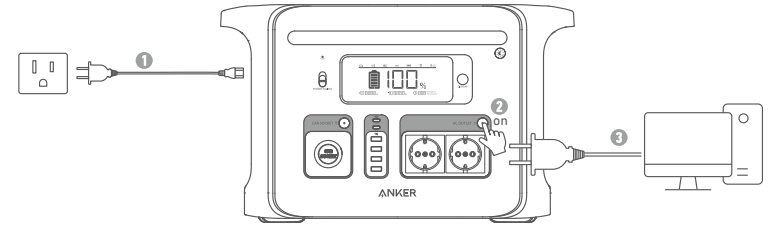

## Power Saving Mode

Switching on the power saving mode prevents wasting power by automatically turning off the Power Station once all your devices are fully charged.

Switching off the power saving mode will enable stable charging over an extended period, such as for time-lapse photography or for sleeping with a CPAP machine.

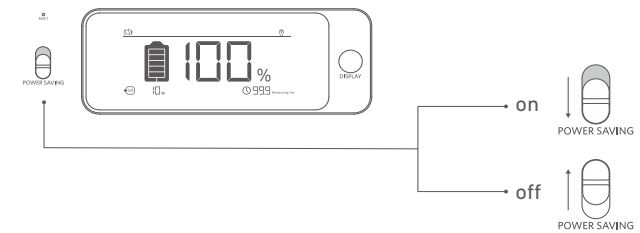

## Light


### Ambient light

Press the button once to turn on the ambient light, and press again up to 2 times to switch between brightness levels.




### SOS mode

Press and hold the button for 2 seconds to turn on SOS mode.

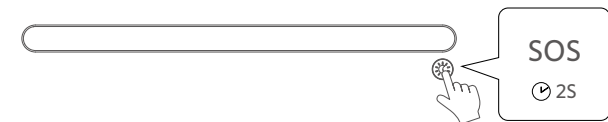

## LCD Screen Guide

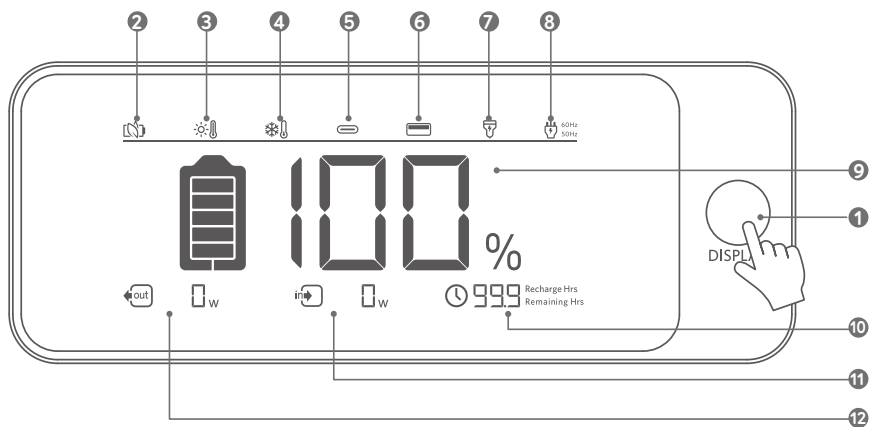


- 1 **LCD Screen Button**  
Press the button to turn on the LCD screen.
- 2 **Power Saving Mode**
- 3 **High-Temperature Alert**  
• When this icon shows, stop using the product and leave it to cool down until the icon disappears.
- 4 **Low-Temperature Alert**  
• When this icon shows, stop using the product until the icon disappears.
- 5 **USB-C Output Port**
- 6 **USB-A Output**
- 7 **Car Charging**
- 8 **AC Charging and Voltage Frequency**
- 9 **Remaining Battery**
- 10 **Time to Recharge / Remaining Battery in Hours**
- 11 **Current Input Power**
- 12 **Current Output Power**

## Trouble Shooting

### AC recharging failure

When AC recharging is unavailable, check to see if the overload protection switch is switched on. If so, press it down to reset, and then recharging can resume.

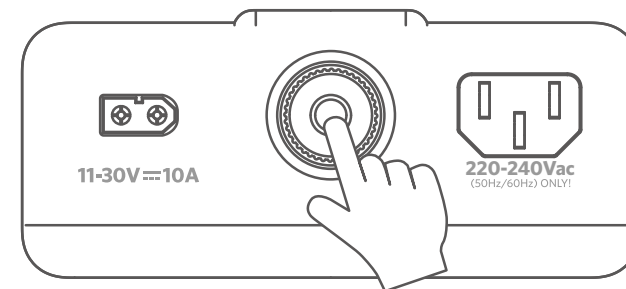


### AC charging failure

If AC charging is unavailable, it's possible that the connected devices exceed 1500W. Try unplugging one or more of the connected devices to see if this resolves the issue.

### Resetting your Power Station

If your Power Station isn't working correctly, press the reset button (located on the front of the product) for 1 second for a factory reset. If the Power Station still doesn't work, please visit [support@anker.com](mailto:support@anker.com)

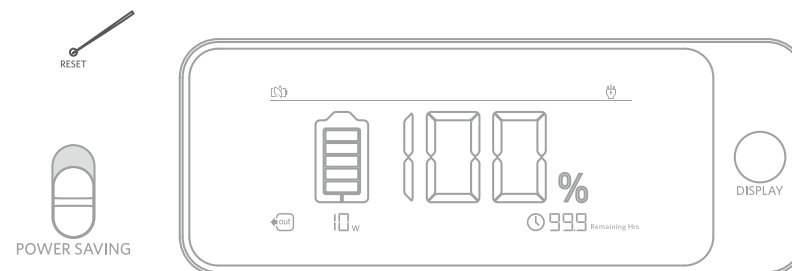

## FAQ

### Q1: Why does the Power Station's battery drain even when no devices are connected?

When the AC and Car Socket control button is turned on, even if no devices are being charged, there will still be a certain amount of no-load power consumption. To avoid this, make sure the AC and Car Socket charging button is off or turn on the power saving mode when you're not using the Power Station.

### Q2: What's the max power output of the AC output ports?

The AC output ports can deliver a maximum of 1500W to connected devices.

### Q3: Can I recharge the product while charging connected devices?

Yes.

### Q4: Can this product power a CPAP machine?

Yes, but make sure to turn off the power saving mode first.

### Q5: What kind of solar charger can charge this product?

Any 11-30V solar charger with an XT-60 female connector.

## Specifications

Cell Capacity	1229 Wh
AC Input Voltage	220-240V~, 50Hz/60Hz
AC Input Power (Charging)	1000W Max
AC Input Power (Bypass Mode)	1500W Max
Solar Panel Input	11-30V $\overline{\text{---}}$ 10A(300W Max)
Car Charger Output	12V $\overline{\text{---}}$ 10A
AC Output	220-240V, 50Hz, 1500W Max
USB-A Output	5V $\overline{\text{---}}$ 2.4A (2.4A Max Per Port)
USB-C Output (100W)	5V $\overline{\text{---}}$ 3A/9V $\overline{\text{---}}$ 3A/15V $\overline{\text{---}}$ 3A/20V $\overline{\text{---}}$ 3A/20V $\overline{\text{---}}$ 5A (100W Max)
USB-C Output (60W)	5V $\overline{\text{---}}$ 3A/9V $\overline{\text{---}}$ 3A/15V $\overline{\text{---}}$ 3A/20V $\overline{\text{---}}$ 3A (60W Max)
UPS	<20ms
Discharging Temperature	-4°F-104°F / -20°C-40°C
Charging Temperature	32°F-104°F / 0°C-40°C
Size	46.3*28.8*23.7 cm/ 18.2*11.3*9.3 inches
Net Weight	19.9 kg/ 43.9 lb
Gross Weight	22.1 kg/ 48.7 lb

## Attention



Not permitted on aircraft.

## IMPORTANT SAFETY INSTRUCTIONS

**WARNING** - When using this product, basic precautions should always be followed, including the following:  
Read all the instructions before using the product.

- To reduce the risk of injury, close supervision is necessary when the product is used near children.
  - Do not put fingers or hands into the product.
  - Do not expose the product to rain or snow.
  - Use of a power supply or charger not recommended or sold by the product manufacturer may result in a risk of fire or injury to persons.
- To reduce risk of damage to the electric plug and cord, pull the plug rather than the cord when disconnecting the product.
- Do not use the product in excess of its output rating. Overload outputs above rating may result in a risk of fire or injury to persons.
  - Do not use the product that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
  - Do not operate the product with a damaged cord or plug, or a damaged output cable.
  - Do not disassemble the product. Take it to a qualified service person when service or repair is required.

Incorrect reassembly may result in a risk of fire or electric shock.

- Do not expose to fire or high temperatures. Exposure to fire or temperatures above 130°C may cause explosion. To reduce the risk of electric shock, unplug the power pack from the outlet before attempting any instructed servicing.
- Have servicing performed by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.
- When charging a device, the product may feel warm, this is a normal operating condition and should not be cause for concern.

When charging the internal battery, work in a well ventilated area and do not restrict ventilation in any way.

- Do not clean the product with harmful chemicals or detergents.
- Misuse, dropping or excessive force may cause product damage.
- When disposing of secondary cells or batteries, keep cells or batteries of different electrochemical systems separate from each other.

**CAUTION:** Risk of explosion if the battery is replaced by an incorrect one.

- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, can result in an explosion;
- Leaving a battery in an extremely high temperature environment can result in an explosion or leakage of flammable liquid or gas;
- A battery subjected to extremely low air pressure may cause an explosion or leakage of flammable liquid or gas;
- Unplug the AC power cable to disconnect from line voltage.

### WARNING: GROUNDING INSTRUCTIONS

This product must be grounded. In the event of malfunction or breakdown, grounding provides a path of least resistance for electrical current to reduce the risk of electric shock. This product is equipped with a cord having an equipment grounding conductor and a grounding plug. The plug must be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING** – Improper connection of the equipment grounding conductor may result in an electric shock. Check with a qualified electrician if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product – if it does not fit the outlet, have a proper outlet installed by a qualified electrician.

### Storage and Maintenance instructions

1. Store the product between 32°F-104°F (0°C-40°C). Avoid exposing the product to rain or using the product in a humid environment.
2. To preserve the battery lifespan, charge to 100% after using. If you plan to store your power station, recharge to 100% every 3 months.
3. Keep the product on a flat surface when using, charging, and storing.

### Declaration of Conformity

Hereby, Anker Innovations Limited declares that the product type A1770 is in compliance with Directives 2014/35/EU & 2014/30/EU & 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address:

<https://www.anker.com>

### GB Declaration of Conformity

Hereby, Anker Innovations Limited declares that the product type A1770 is in compliance with Electrical Equipment (Safety) Regulations 2016 & Electromagnetic Compatibility Regulations 2016 & The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012. The full text of the GB declaration of conformity is available at the following internet address:

<https://www.anker.com>

Anker Innovations Limited | Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, HongKong

The following importer is the responsible party (contract for EU and UK matters)

Anker Innovations Deutschland GmbH | Georg-Mueller-Strasse 3, 80807 Munich, Germany

Anker Technology (UK) Limited,

GNR8, 49 Clarendon Road, Watford, Hertfordshire, WD17 1HP, United Kingdom



This symbol indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

## Disclaimer

The Uninterruptible Power Supply (UPS) function is designed and manufactured for use in OA equipment such as PCs.

Do not use UPS in situations or with equipment that requires extremely high reliability or safety, such as the following:

- Medical equipment that directly affects human life.
- Equipment that may result in personal injury (such as equipment directly related to the operation and control of aircraft, ships, railroads, elevators, etc., or equipment that may be subject to constant vibration, such as automotive and marine equipment).

The product is not for use in high-risk activities. The product is not designed or intended for use in hazardous environments requiring fail-safe performance, or for use in any circumstance in which the failure of the product could lead directly to death, personal injury, severe physical or property damage, or that would affect the operation or safety of any medical or life support device (collectively, "High-Risk Activities"). Anker expressly disclaims any express or implied warranty of fitness for High-Risk Activities. Anker does not authorize use of any product in any High-Risk Activities. Any such use is improper and is a misuse of the product.

## Anker Portable Power Station Warranty Policy

All Anker portable power stations purchased on AnkerDirect and Anker authorized resellers come with a limited warranty ("warranty") as set out below. By using an Anker portable power station, you are agreeing to be bound by the terms of the Anker limited warranty.

We provide a 5-year limited warranty for purchases made on AnkerDirect and Anker authorized resellers. The warranty period starts from the date of purchase.

Anker's limited warranty is restricted to the country of purchase. The limited warranty is void on items taken outside the country they were originally bought in or shipped to directly from an authorized online purchase.

### Exclusions and Limitations

Not covered under warranty:

- Products that are damaged or modified.
- Products operated with a damaged cord, plug, or output cable.
- Products that are disassembled.
- Products that are cleaned with harmful chemicals or detergents.
- Non-quality related issues (after 30 days of purchase).
- Products purchased from unauthorized resellers.
- Products without sufficient proof of purchase.
- Products that have been refunded.
- Products with an expired warranty.
- Lost, stolen, or free products.
- Damage from outside sources.
- Repairs through 3rd parties.
- Damage from misuse of products (including, but not limited to falls, use of the product in excess of its output rating, exposure of the product to rain or snow, extremely low air pressure, extreme temperatures).
- Purchases from illegitimate resources.
- Batteries that are damaged when not used for a long time or not properly maintained according to the user manual.

### Anker is Not Liable For:

- Loss of data incurred from the use of Anker products.
- Returning personal items sent to Anker.

When returning items with a prepaid shipping label provided by Anker, Anker takes responsibility for any damage or loss incurred in transit. When returning items for non-quality issues, the buyer assumes responsibility for any damage or loss incurred in transit. Anker does not provide refunds for items damaged in transit due to nonquality related warranty claims.

### Refund and Warranty Claims

We offer a 30-day money-back guarantee for any reason as well as warranty claims for quality-related issues. For more details please refer to [www.anker.com/anker-portable-power-station-warranty-policy](http://www.anker.com/anker-portable-power-station-warranty-policy)

### For warranty claims, you can send an email to:

US/CA/UK/DE/JP market: [support@anker.com](mailto:support@anker.com)

MEA market: [support.mea@anker.com](mailto:support.mea@anker.com)

CN market: [CEC-CN@anker.com](mailto:CEC-CN@anker.com)

### Or you can call us at:

US/CA: +1 (800)988 7973

UK: +44(0)1604 936 200

DE: +49(0)69 9579 7960

JP: +81 03 4455 7823

UAE: +971 8000 320 817

KSA: +966 8008 500 030

Kuwait: +965 2206 9086

Egypt: +20 8000 000 826

AU: +61 3 8331 4800

TR: +90(850)460 1414

RU: +8(800)511 8623

CN: +86 400 0550 036

KR: +82 0216 7070 98

IN: +91 1800 3138 831

Middle East & Africa: +971 4242 8633

### Valid Proof of Purchase

Please refer to: <https://us.anker.com/policies/refund-policy>

## Shipping Costs Must Be Covered by the Buyer in the Following Situations

Please refer to: <https://us.anker.com/policies/refund-policy>

This page is attached to the Anker warranty page, and Anker reserves the right of final interpretation of the content.

## Register Your Anker PowerHouse Today

### Why Register?

1. Hassle-Free Warranty: Confirm the 5-year warranty for your Anker PowerHouse.
2. Fast Customer Service: Enjoy exclusive customer service and get what you need quickly.
3. Receive the Latest News: Get exclusive first looks at new products and instant updates on official events.



- Scan the QR code below to enter the smart self-service page for more information about your PowerHouse.



## Customer service

**DE:** Kundenservice  
**IT:** Servizio Clienti  
**TR:** Müşteri Hizmetleri

**ES:** Atención al Cliente  
**PT:** Serviço de Apoio ao Clien  
**简体中文:** 客服支持

**FR:** Service Client  
**RU:** Обслуживание клиентов  
**繁體中文:** 客戶服務

:AR خدمة العملاء



**EN:** 5-Year Limited Warranty\*  
**ES:** Garantía limitada de 5 años\*  
**IT:** Garanzia limitata di 5 anni\*  
**RU:** 5-летняя ограниченная гарантия  
**繁體中文:** 5年有限保固

**DE:** 5 Jahre eingeschränkte Garantie\*  
**FR:** Garantie limitée de 5 ans\*  
**PT:** 5 anos de garantia limitada  
**TR:** 5 Yıllık Sınırlı Garanti  
**简体中文:** 5年有限保修

:AR ضمان محدود لمدة 5 تاوانس

\***EN:** Please note that your rights under applicable law governing the sale of consumer goods remain unaffected by the warranties given in this Limited Warranty.

**DE:** Die gesetzlichen Gewährleistungspflichten bleiben von der beschränkten Herstellergarantie unberührt.

**ES:** Tenga en cuenta que los derechos que le conceden las leyes aplicables que rigen la venta de bienes de consumo no se ven afectados por las garantías que proporciona esta garantía limitada.

**FR:** Notez que vos droits dans le cadre de la législation régissant la vente de biens de consommation ne sont pas affectés par les garanties accordées dans cette garantie limitée.

**IT:** Si prega di notare che i diritti del cliente ai sensi della legge applicabile in materia di vendita di beni di consumo non sono influenzati dalle garanzie concesse dalla presente Garanzia limitata.



**EN:** Lifetime technical support  
**ES:** Asistencia técnica permanente  
**IT:** Supporto tecnico per l'intero ciclo di vita  
**RU:** Пожизненная техническая поддержка  
**繁體中文:** 永久技術支援

**DE:** Technischer Support für die Produktlebensdauer  
**FR:** Assistance technique à vie  
**PT:** Suporte técnico vitalício  
**TR:** Ömür Boyu Teknik Destek  
**简体中文:** 终身技术支持

:AR دعم فني مدى الحياة



support@anker.com  
support.me@anker.com (For Middle East and Africa Only)



(US/CA) +1 (800)988 7973  
(UK) +44 (0) 1604 936200  
(DE) +49 (0) 69 9579 7960  
(Middle East & Africa) +971 42428633  
(UAE) +971 8000320817  
(KSA) +966 8008500030  
(Kuwait) +965 22069086  
(Egypt) +20 8000000826  
(AU) +61 3 8331 4800  
(TR) +90 0850 460 14 14  
(RU) +8 (800) 511-86-23  
(India) +91 18003138831  
(中国) +86 400 0550 036  
(日本) 03 4455 7823  
(한국) +82 02-1670-7098